

RoHS

SPECIFICATIONS PERFORMANCE

Electical Rating:AC/DC 50V 0.5A

Insulation Resistance: 500MΩ

Contact Resistance:50mΩ Max

Withstang Volt:150V AC/minute

Opratng Temperature:-40°Cto+105°C

Material


Cap:Stainless steel

Contact:Phosphor Bronze Gold-Plated

Insulator Material:Polyester(UL94V-0)

Housing:LCP

Max.Processing Temp:230°C for30-60 seconds
(260°C for 10 seconds)

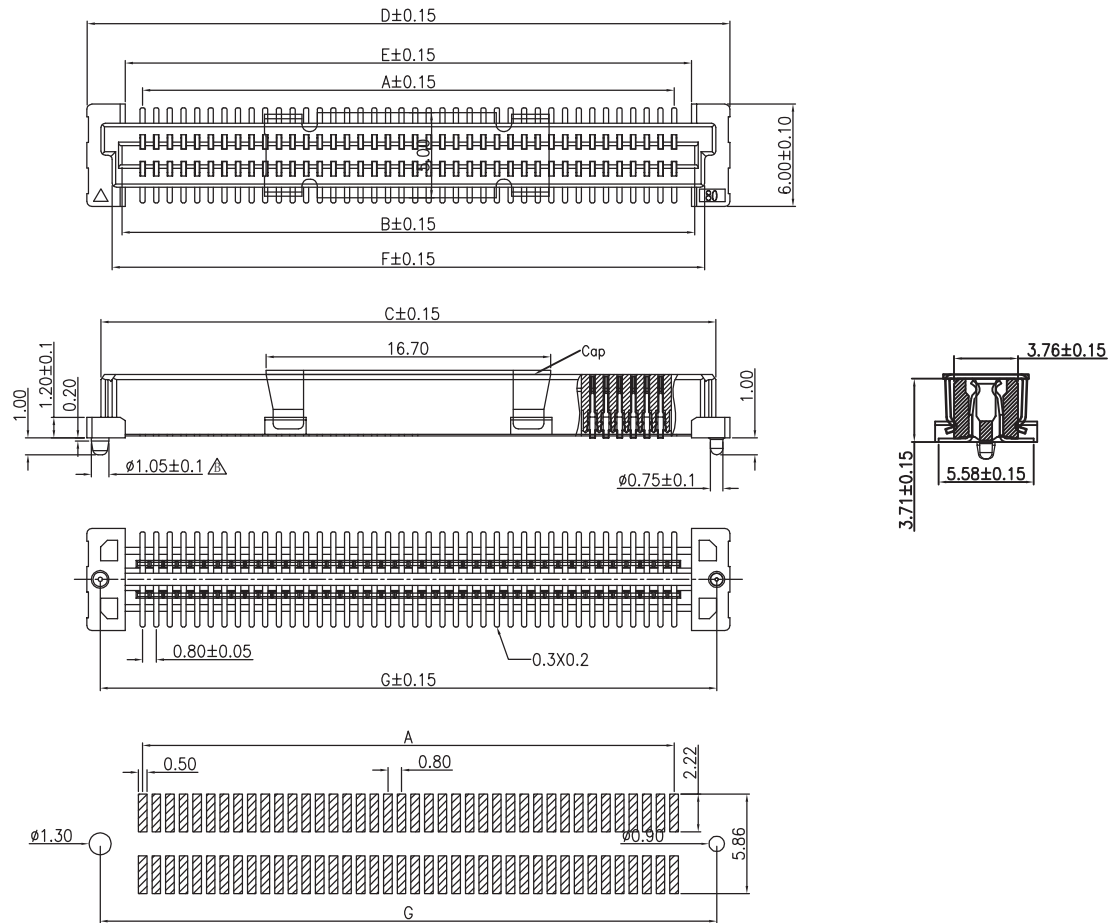

PCB LAYOUT

P数	A	B	C	D	E	F	G
24	8.80	11.24	13.70	15.36	10.84	12.38	13.80
40	15.20	17.64	20.10	21.76	17.24	18.78	20.20
60	23.20	25.64	28.10	29.76	25.24	26.78	28.20
80	31.20	33.64	36.10	37.76	33.24	34.78	36.20
100	39.20	41.64	44.10	45.76	41.24	42.78	44.20
120	47.20	49.64	52.01	53.76	49.24	50.78	52.20
140	55.20	57.64	60.01	61.76	57.24	58.78	60.20

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

LINYUN

17.06.10

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

PROJ.

深圳市创勤电子有限公司
SHENZHEN CHUANGQIN ELECTRONICS CO., LTD.

PART NO.

CQ047-88F060038G0FR01

TITLE:

0.8BTB-NPIN H=3.8 Female

A

A

1

2

3

4

5

6

7

8

9

B

B

C

C

D

D

E

E

F

F

G

G