
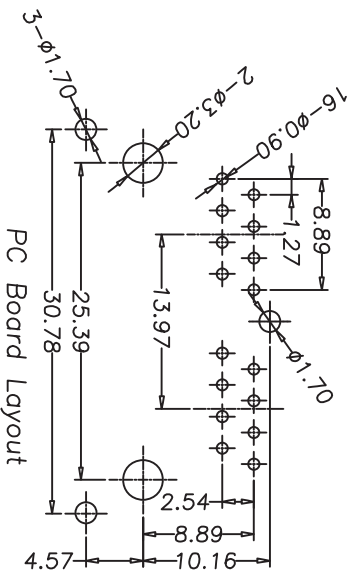




更改 REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	图纸发行	2012/10/29	JDL	Oscar



NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON+30%G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE ∅0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- LED-OPTION
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO +70°C.
- WAVE SOLDERING TEMPERATURE: 255°~265° (5~10SECONDS).
- ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 59A-S1208A-XX

- GOLD PLATING U" : 1-Fu" 2-2u" 3-3u" 4-6u"
- PLASTIC MATERIAL&COLOR:Black/Yellow/Gray
- 2-PA46 Black

:Inspection Item		:Cp/Cpk and SPC Control Item		Shenzhen Chuangqin Technology Co., Ltd.	
DIMENSION IN mm [Inch]		TOLERANCE UNLESS OTHERWISE SPECIFIED		深圳市创勤科技有限公司	
.X±0.20 X*±1"		.XXX±0.15 X*±0.5"		图号 DWG NO. 59A-S1208A	
.XXX±0.075		X*±0.075		标题 TITLE 59A 1X2 8P8C PCB JACK WITH SHIELDED SIDE ENTRY,ROUND PIN	
批准 APPROVE		检查 CHECK		制图 DRAW Oscar	
				审核 SCALE 1:1	
				图幅 SIZE A3	
				数量 REV 1	
				页次 REV A	

